

## 72x30mm Ucode 8 Dry Inlay

This inlay is compatible with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~960MHz. Each tag has a unique ID and stores user data. It is designed for packing management, logistics management, assets management, etc.

### Physical Features:

Antenna Size:	72x30mm
Wet Inlay/Label Size:	75x33mm(customized)
Label Material :	Coated Paper/PET/Fragile Paper
Working Temp:	-40~+85°C
Storage Temp:	-40~+85°C


### RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	NXP Ucode 8
EPC Memory:	128 bit
TID Memory:	96 bit
Read Range(2W ERP):	16m


### Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Application:	<ul style="list-style-type: none"> <li>● Packing management</li> <li>● Logistics management</li> <li>● Document management</li> <li>● Assets management, etc.</li> </ul>

## Dimensions:

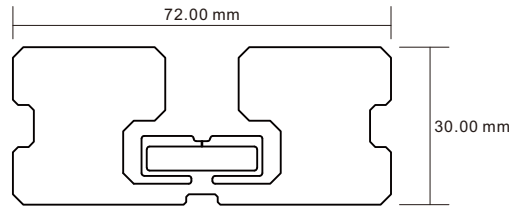

## Read Range(2W ERP):

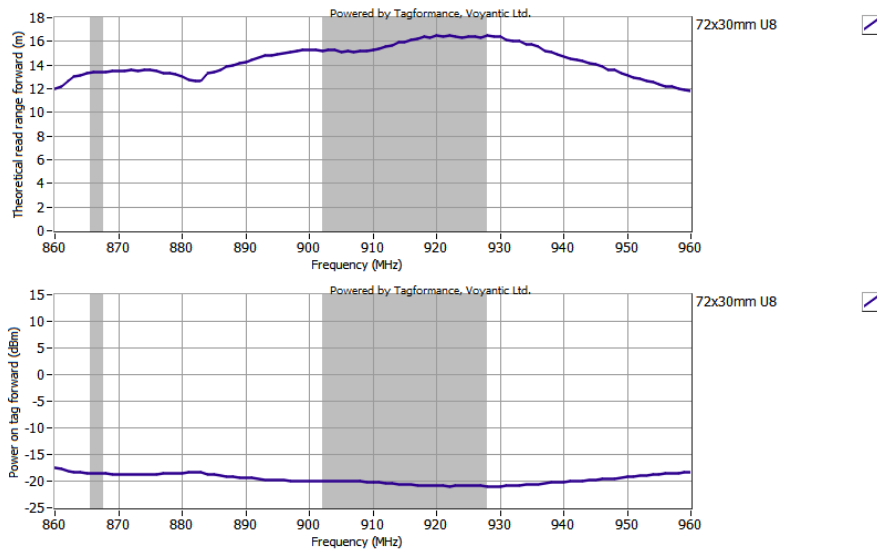

## Application:



RICHRFID branch location:  
 Shenzhen | Shanghai | Beijing | Spain  
 For product and technology inquiries E-mail: [info@richrfid.com](mailto:info@richrfid.com)

